


Rev:A00

SMA-MM-L-2.2mm Nb-Ti Cable

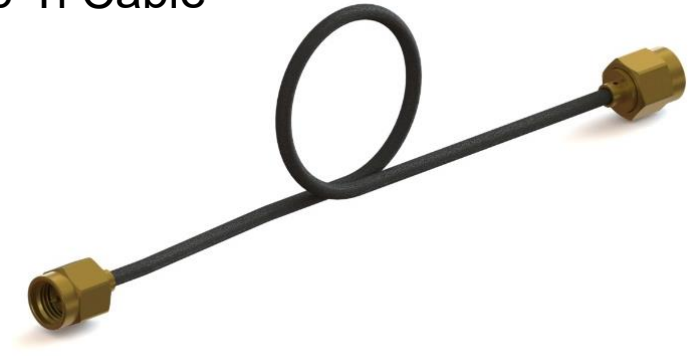

Length, connector and bending mode can be customized.

Technical requirements

Item	Specification
Frequency range	DC-12GHz, 12GHz-18GHz
Return loss	$\geq 19\text{dB@DC-12GHz}(300\text{K})$ $\geq 16\text{dB@12-18GHz}(300\text{K})$ $\geq 18\text{dB@DC-12GHz}(77\text{K})$ $\geq 15\text{dB@12-18GHz}(77\text{K})$
Insert loss	Superconducting under ultra-low temperature
Insulation resistance	$\geq 5000\text{M}\Omega$
Dielectrics voltage resistance	$\leq 1000\text{Vrms}$
Temperature	10mK-300K
Connector	SMA-M & SMA-M


Material and surface

	Item	Material	Surface
SMA Connector	Outer conductor	Beryllium bronze	Non-magnetic gold plated
	Center conductor	Beryllium bronze	Non-magnetic gold plated
	Connector-dielectric	PTFE	/
	Cable	Nb-Ti	/


SMA-MM-L-2.2mm Nb-Ti Cable Assembly

Test results (CASG01811A360)

Measure data, $T_{amb}=300K$

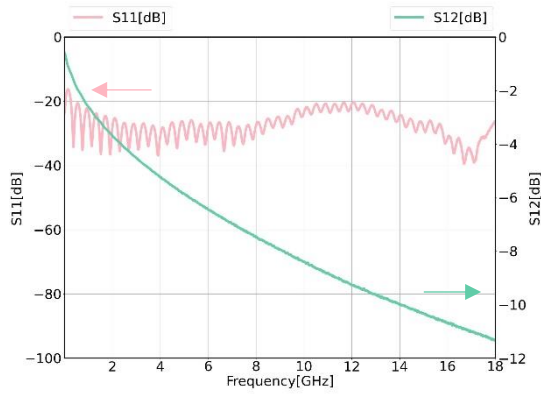

Measure data, $T_{amb}=77K$

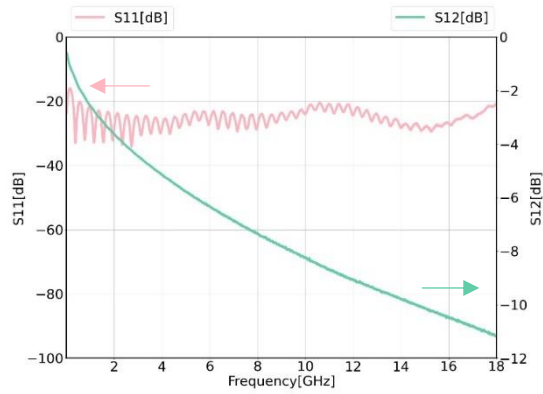

Outline drawing (Unmarked tolerance: $\pm 0.1mm$)

